Parts Page Reorder No. PD91•6
Effective January, 1991

Disc Sander

Model:
50240 — 15,000 RPM

WARNING **Always operate, inspect and maintain this tool in accordance with the Safety Code for portable air tools (ANSI B186.1) and any other applicable safety codes and regulations. Please refer to Dynabrade's Warning/Safety Operating Instructions for more complete safety information.**

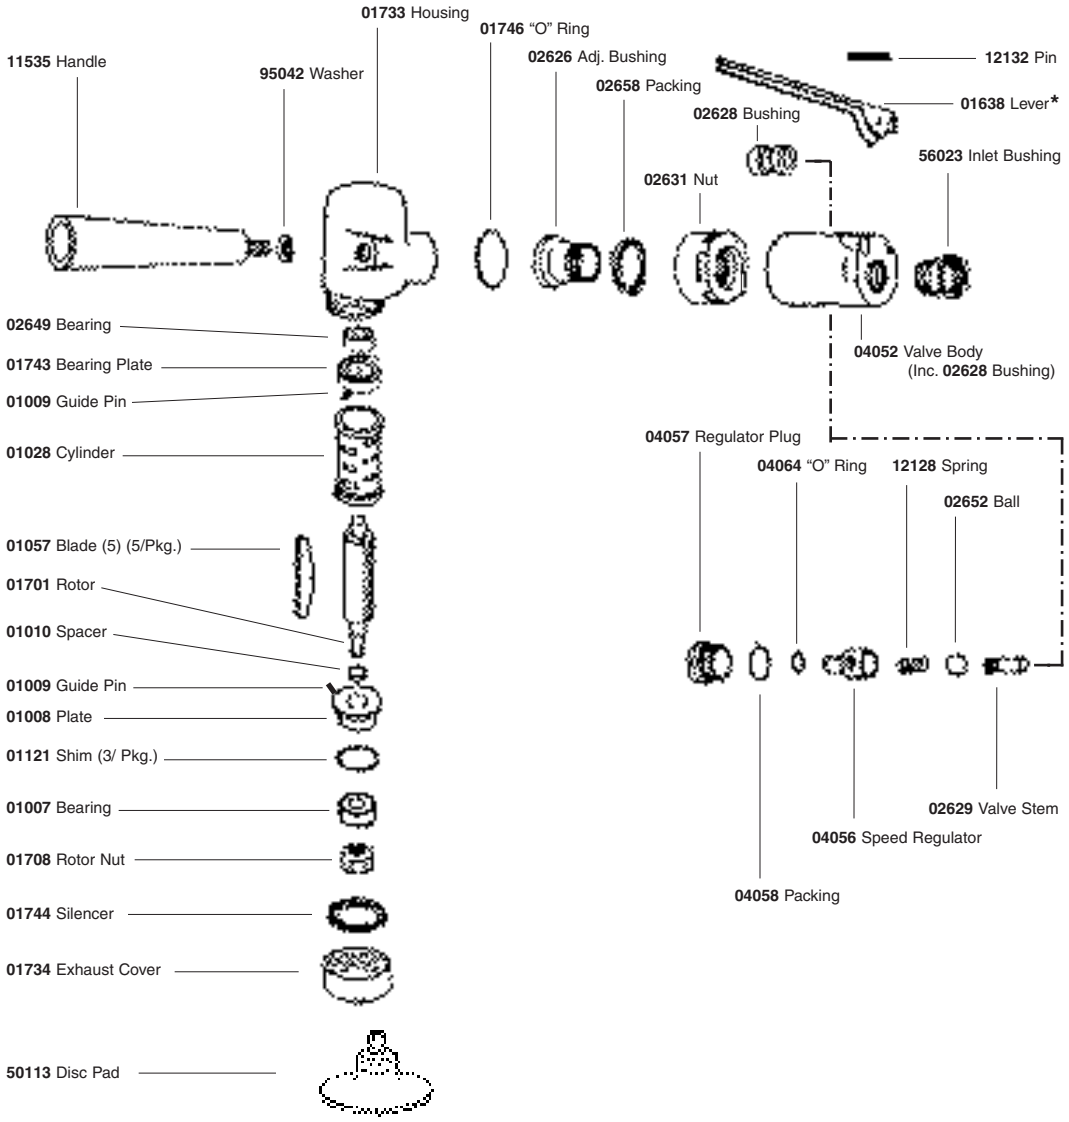

* **01637** Safety lock lever assembly available.

Optional Accessories



50061 Collet Assembly Includes:
50062 Collet Body
50063 Collet Cap
50064 1/4" Collet Insert



53032 1/4" Drill Chuck Includes:
53032 Mated Chuck Key



50065 1/8" Collet Insert



Dynaswivel®
Swivels 360° at two locations which allows an air hose to drop straight to the floor, no matter how the tool is held.

- 95460 1/4" NPT.
- 95461 3/8" NPT.
- 95462 1/2" NPT.

Wrenches



95281 19 mm wrench

IMPORTANT: ALL DYNABRADE AIR TOOLS MUST BE USED WITH A FILTER-REGULATOR-LUBRICATOR TO MAINTAIN ALL WARRANTIES

IMPORTANT

- Tool RPM rating must never exceed abrasive/accessory RPM rating, regardless of the tool's capacity.
- Check tool speed regularly with a tachometer. If tool is operating at a higher speed than the RPM marked on the tool, the tool should be serviced to correct the cause before use.
- 11289 Air Line Filter-Regulator-Lubricator – Provides water contaminants and micro-mist lubrication of pnuematic components; operates 28 CFM @ 90 PSI; has 3/8" female ports.
- Gear case of this Dynabrade air tool should be lubricated every 50 hours by using 95541 Grease Gun and 95542 Grease. To reorder:
- 95541 – Push-type grease gun; for one-hand operation.
- 95542 – Grease (10 oz. tube; 283.5 g.) Multi-purpose for all types of bearings, cams, gears. High film strength; excellent resistance to water, steam, etc. workable range 0° F to 300° F.

Note: To order replacement parts specify the model and serial number of your machine.
Warning: Hand, wrist and arm injury may result from repetitive work motion and overexposure to vibration.

DYNABRADE™

DYNABRADE, INC., 8989 Sheridan Drive • Clarence, New York 14031-1490 • Phone: (716) 631-0100 • Fax: 716-631-2073 • Telex: 646540
DYNABRADE EUROPE s.a.r.l., Zone Artisanale • L-5485 Wormeldange—Haut, Luxembourg • Telephone: 352 76 84 94 • Fax: 352 76 84 95

© DYNABRADE, INC., 1991
PRINTED IN USA.